

VC-X

Amplifier for Audio Description



Vista Group's **VC-X with earphone detect option** is a compact, easy way to offer audio description with volume control and reset it automatically for the next user.

Feed the audio description soundtrack to the VC-X Audio In jack. Connect the volume control push buttons to screw terminals Common/Up/Down. Connect your remote user earphone jack to the earphone jack on the VC-X end panel. Set Dip Switch #1 on the back panel to the up position.

Volume reset is triggered when the visitor inserts a mono or stereo 3.5mm headphone plug into the jack.

Pre-wired power supply included.

Other modes reset volume when a visitor presses a program start switch or when the program(s) finish playing.

Vista Group's family of audio products has been serving the museum community, here and abroad, for over 25 years. Clients include museums, libraries, historical societies, halls of fame, nature centers, tradeshow and corporations.


Vista Group International

25 Van Zant Street, Unit 8D, Norwalk, CT 06855
800-866-2113 / 203-852-5557 FAX: 203-852-5559
www.VistaGroupInternational.com
email: info@vistagroupinternational.com

VC-X

volume control with auto-reset

www.VistaGroupInternational.com

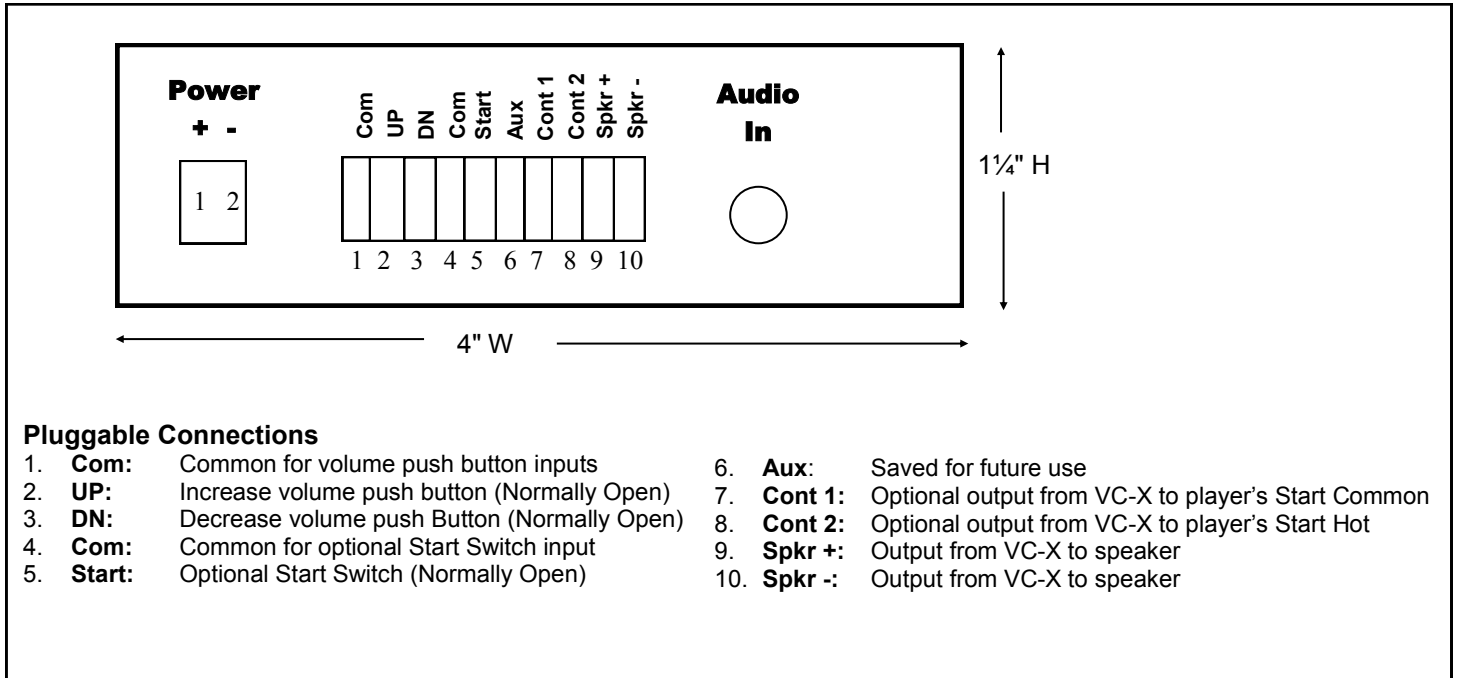

Specifications

Audio Input	Line Level or Headphone Output, High Impedance
Audio Output	1 Watt, 8 Ohm to 32 Ohm, Mono
Power Supply (Standard)	5V Regulated Switchable for Mains Value
Max Power Consumption	200 Milliamps
Status Indicator	Power LED
Push Buttons (Optional)	Dry Contact Normally Open
Size	4"W 1.25"H, 2.25"D
Color	Black Paint with White Silk Screen
Material	Aluminum
Warranty	1 Year
Optional Accessories	<ul style="list-style-type: none"> • Push Buttons: Triangular, LCD and Arcade-style • ADA Signage: Braille/Raised Letters • Loud Speakers; Message Repeaters • Message Production and Translation • Custom Panels with Equipment Installed • SOUNDSTIK® Handheld Speaker