



# SOUNDSTIK<sup>®</sup> mp3

*with auto-reset volume*

Install a SOUNDSTIKmp3 and your exhibit audio is done.

Adding or updating messages is quick and convenient. Download your message directly to the handset via USB.

Visitors simply lift the SOUNDSTIKmp3 from its Hanger Mount to listen. The message starts on pick-up. Visitors may adjust the volume with push buttons to suit their own needs.

When the SOUNDSTIKmp3 is replaced to its Hanger Mount, it resets the message to the beginning and **resets the volume to mid-range automatically.**

The Hanger Mount, power adapter and a Plug and Play wiring kit are included.

The SOUNDSTIKmp3 may be ordered pre-installed on panels with your own background image. Call for details.

Typical Applications:

- Audio Upgrade for Static Exhibits
- Audio Description for Visitors with Low Vision
- Wherever ADA 508 Compliance is Desired

The SOUNDSTIKmp3 with auto-reset volume is certified Hearing Aid T-Coil Compatible.

Vista Group's popular family of SoundStik<sup>®</sup> products has been serving the museum community, here and abroad, for over 25 years. Clients include museums, libraries, historical societies, halls of fame, nature centers, tradeshow and corporations.

Vista Group also manufactures outdoor SoundPost<sup>®</sup> systems for gardens, parks and overlooks and provides equipment and services for tour guides and self-guided audio tours.



## Vista Group International

25 Van Zant Street, Unit 8D, Norwalk, CT 06855

800-866-2113 / 203-852-5557 FAX: 203-852-5559

[www.VistaGroupInternational.com](http://www.VistaGroupInternational.com)




email: [info@vistagroupinternational.com](mailto:info@vistagroupinternational.com)




# SOUNDSTIK<sup>®</sup> mp3

*with auto-reset volume*

www.VistaGroupInternational.com

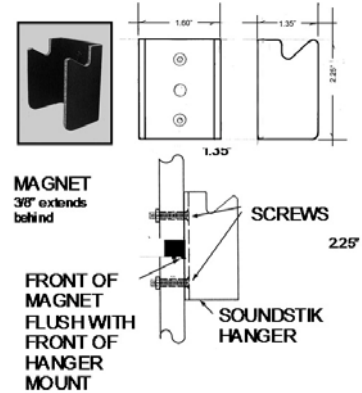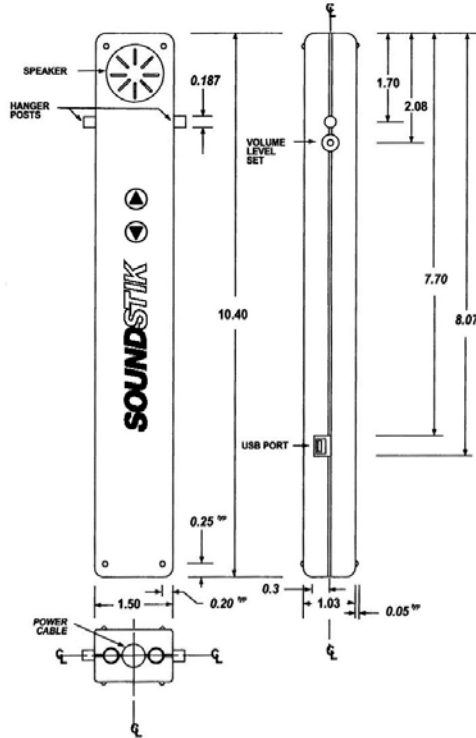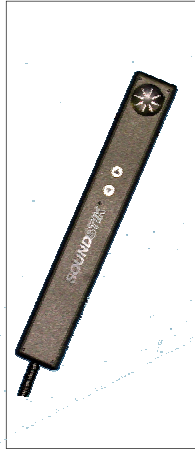

## Specifications

<b>Material</b>	High impact, flame retardant ABS, UL 94-VO	<b>Hearing Aid and T-Coil Compatible</b>	 Yes
<b>Size</b>	10.5"L, 1.5"W, 1"D	<b>Power Supply</b>	Switchable 5V Regulated
<b>Color</b>	Black	<b>Max Power Consumption</b>	.600 Milliwatts
<b>Push Buttons (Standard)</b>	Light Gray, Tactile	<b>Control Switch</b>	Magnetic
<b>Armored Tether (Standard)</b>	Stainless Steel, 48", Black	<b>Controls (Optional)</b>	Start or Stop Device, NO or NC Condition
<b>Interior Restrainer Cable</b>	Stainless Steel	<b>Connections</b>	2 Wire, Stereo Mini, RCA
<b>Speaker</b>	32 Ohm, Samarium Mylar	<b>Hanger Mount Material</b>	Aluminum
<b>Frequency Response</b>	100Hz-20kHz	<b>Hanger Mount Finish</b>	Black
<b>THD</b>	less than 10%	<b>Hanger Mount Size with Magnet</b>	2.38"L, 1.88"W, 1.50"D
<b>Volume Adjustment Relative to Client Input</b>	+/- 15dB	<b>ROHS</b>	Compliant
		<b>Warranty</b>	1 Year