




# SOUNDSTIK® Expansion Module

For interactive, multi-language audio + usage data

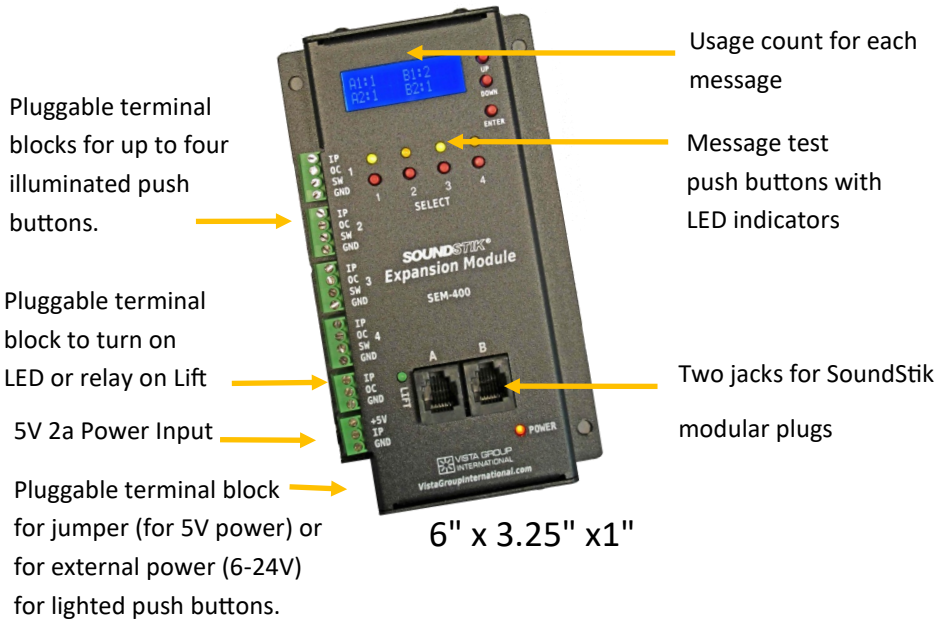


Pluggable terminal blocks for up to four illuminated push buttons.

Pluggable terminal block to turn on LED or relay on Lift

5V 2a Power Input  
Pluggable terminal block for jumper (for 5V power) or for external power (6-24V) for lighted push buttons.

Usage count for each message  
Message test push buttons with LED indicators  
Two jacks for SoundStik modular plugs

6" x 3.25" x 1"

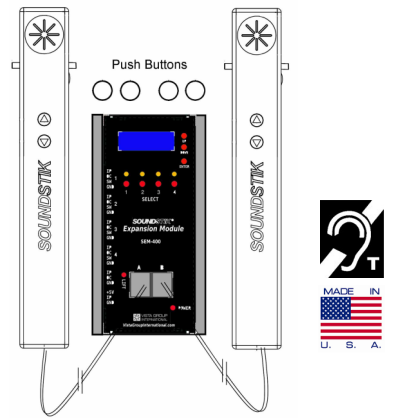

**Mode 1: One handset**  
Plays 1- 4 mp3 files

**Mode 2: Two handsets**  
Each plays 1- 2 mp3 files

Every message starts from the beginning. Volume resets.

## Small add-on with big results.

Multiply the interpretive value of your exhibit with the new SEM-400 and one or two SoundStik-mp3 handsets.

Visitors lift a SoundStik and listen. Your first story starts automatically. Your optional LED or relay activates. The on-board display registers the use. With push buttons on your display, visitors can select from up to four programs and enjoy more meaningful exhibit interpretation.

### Problem solver:

- Trying to serve diverse audiences? Now you can offer multiple languages or contrasting viewpoints on the same topic.
- Visitors bored by static exhibits? Energize them with the impact of sound.
- Need usage data for your grant evaluation? Got it.



### SoundStik-mp3

May be used alone as a self-contained one-message system

- Fulfills ADA and §508 disability access and anti-discrimination regulations
- Eco-friendly materials

*We Bring Exhibits to Life*



Woman Owned Small Business SAM Active ECCN: EAR99  
 25 Van Zant Street, Unit 14-7B, Norwalk, CT 06855  
 US Toll Free: 1.800.866.2113 TEL: +1.203.852.5557 FAX: +1.203.852.5559

## SoundStik Expansion Module



The SoundStik Expansion Module is used with one or two SoundStik-mp3 handsets and 0-4 remote push buttons. The system can store, play and track usage for 1 to 4 mp3 files.

### How It Works

#### **SoundStik lift from Hanger Mount**

- Starts the default message (unless a push button has been pressed first, as might be the case for language selection).
- Increases the count on the on-board LED display.
- Optional: Turns on an external relay or LED. (Remains active until last SoundStik is hung up)

### **MP3 Programs**

Single mp3 file: Starts on lift, does not require a remote push button.

Multiple mp3 programs: Uses remote pushbuttons on the exhibit. Starts default message or selected message.

Mp3 program playback: Plays once and stops. Push buttons may be pressed randomly to start next message without requiring the SoundStik to be returned to its Hanger Mount.

Mp3 file transfer: Loads via PC to SoundStik handset USB. Standard 128 kbps bit rate, 44.1 kHz sampling frequency.

### **Pushbuttons**

Pluggable inputs are available for use with illuminated or non-illuminated pushbuttons and external power supply. No daisy chaining needed. Top panel mini-pushbuttons with LED indicators enable convenient message verification.

**LED Display:** Displays the total uses for each mp3 program. Displays Menu:

Select Mode: One SoundStik or two SoundStik handsets.

Select Default Message: Message named 01.mp3 or last played.

Select Reset count to zero.

The Module will retain the count if power is lost.

### Accessories

The system comes with a 5V 2A Regulated power supply.

Pre-wired vandal resistant illuminated push buttons or arcade style push buttons may be purchased separately.

### SoundStik-mp3 Handsets (purchased after August 15, 2019 or older models updated)

Companion handsets are purchased separately. Volume may be raised or lowered 15 dB by the visitor at any time using the push buttons on the handset. The level will remain at the preferred setting regardless of which push button the visitor selects. It resets for the next visitor upon lift.

### Additional Services:

Translation and narration services are available.

*Adds more value to your already great exhibit!*



Woman Owned Small Business SAM Active ECCN: EAR99

25 Van Zant Street, Unit 14-7B, Norwalk, CT 06855

US Toll Free: 1.800.866.2113 TEL: +1.203.852.5557 FAX: +1.203.852.5559